

Equipment for home and garden

410 T

INNECCCC.

410 TKS

Sprayers for Industry and handcraft

Profiline

410 TK

Including personal mobile product advisor (page 2)



GLORIA online

For further information about GLORIA products, the company itself as well as useful tips about spraying, please go to:

www.gloriagarten.de

www.gloria-industrial-sprayers.com

We are looking forward to your visit to our website!

GLORIA quality



GLORIA product advisor Scan the following QR code and

VIDEO



find the right product for your required field and site of application in a few seconds with the help of the free GLORIA product advisor.



For almost 70 years, the GLORIA name has been synonymous with high quality and technologically sophisticated sprayers. Since as far back as 1945, the company has consistently dedicated itself to the development of pumps and pressure sprayers for the professional's everyday needs. Our development engineers are always mindful of the high technical requirements as well as vastly differing working conditions. With the GLORIA products they aim to assist you in your daily work in the best way possible.

This requirement for high quality is reflected in their production. Whether it be a plastic or stainless steel model, only the best materials are used. GLORIA also makes no compromises when it comes the assembly: the most modern technical facilities form the basis for optimal conditions of assembly: Experienced production personnel ensure the construction of our products is done with the required care. In addition, extensive controls and quality checks form part of GLORIA's standard.

Direct controls, which subsequently influence production, specialist personnel as well as flexibility of the highest degree when it comes to special order - 'Made in Germany' is synonymous with the highest guality standard at GLORIA.

The result: Durable, premium products created for consistent use in the widest applications ranging from industry to trade and agriculture. The **GLORIA Profiline** sprayers are distinguished by their many features and helpful details. Especially when it comes to mould oil application, vehicle care, cleaning and disinfection operations as well as pest control, our equipment impresses with high resilience, efficiency and safety.

GLORIA works according to the guidelines of the DIN ISO 9001 quality standard. We guarantee consistent quality of our products and services, ensuring reliability as well as a high quality standard at all times. Besides being **CE certified,** many of our products have a TÜV/G-seal. an indication of the outstanding level of safety.





GLORIA offers a 10 year service and parts-availability guarantee on all products of the range described in this catalogue, so that you may benefit from the quality of our products in the long term.







Besides regular stress and extreme effects of temperature the sprayers have to sustain particularly oil rich and aggressive spraved media. Hence, in

the production of the GLORIA Profiline models only high-grade materials are used. Thus, the sprayers are mostly fitted out with Viton®seals, which in contrast to prior art seals exhibit a high thermal and chemical durability.



of stainless steel Cleaning-friendly, long-lasting and robust: The particular benefits of rust-proof steel besides its high resistance

against shock and wearout stress are first of all based on the extraordinary corrosion resistance. With these quality features the models 505 and 510 even meet the utmost requirements




Steel sprayers with plastic interior coating

The steel sprayers of the **GLORIA Profiline series first** of all stand out on account of

their high resistance. In order to protect the container material against corrosion, they are equipped with a high-grade interior coating of plastic material. Thereby contact of aggressive sprayed media with the steel container is avoided and cleansing becomes easy, too.

GLORIA Profiline – **Sprayers for special** requirements

GLORIA provides a comprehensive assortment of sprayers for the sophisticated application in industry, handcraft and agriculture. Particularly in professional operation these devices are under highest demand with regards to guality, functionality, versatility and equipment.

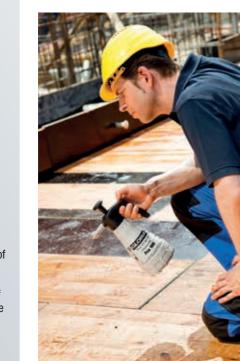

GLORIA Profiline sprayers are excellently approved in the following fields:

- in concrete and building trade for dispersion of mould oil
- in car care and maintenance (e.g. cleaning of engine compartment or wheel housings)
- · in cleaning works in the diverse fields of food industry
- in painting craft for soaking through of wallpaper and spraying of walls
- for cleaning and disinfection of stablings and rooms in agriculture
- for disinfection of sanitary facilities
- for pest control
- for control of epidemics



Compressor coupling (model dependent): Consistent container pressure for continual operation without manual pumping.



Spray pipe receptor and retainer: Protection for nozzle and spray pipe from damage and dirt.



Analogue manometer, safety and ventilation valve: The operator controls and the manometer are integrated into the filling-funnel in such a way that they are protected and easily leaible



Brass high-performance pump with integrated hose retainer: With ergonomically shaped handles and additional retainer to affix the hose.



Spiral hose: (model dependent or if applicable can be retrofitted) 5 m hose length for even more flexibility.

High-performance sprayers with professional features

The high-performance sprayers are equipped with many features which ensure comfort and safety during use. Whether it be the 5 litre or 10 litre model, all appliances offer helpful details and impress with their quality and reliability











Spray pipe, flat-spray nozzle and quick-action stop valve made from brass: Robust and durable





Simply download a QR code scanner for free, and off you go. You can scan the respective QR code next to the GLORIA product and get access to instructive video and additional picture material as well as supplementary information about the product.





Cushioned carying-straps or, if applicable carrying-belts: Comfort is ensured even with prolonged use.



Storage compartment Spare parts, such as nozzles and seals can be stored here safely and cleanly.



Pump retainer: During filling, the pump can be attached to the appliance.



Large filling funnel Easy filling through the large funnel.



Additional sieve: Dirt particles are captured and clogging of the nozzle is avoided. After use, the sieve is attached to the container.



Transport trolley (can be retrofitted, model dependent): Increased mobility and less muscle power



Steel high performance sprayers




Compressor connection

Oil proof

X

The GLORIA Profiline robust steel high performance sprayers will win you over with the way they're equipped and the multiple ways in which they can be utilised. The devices are largely equipped with Viton-Seals which have a high thermal and chemical resistance. Thus, the machines can endure oily and aggressive spray substances as well as high temperature influences. With a volume of 5 or 10 litres respectively, they offer the highest level of quality and comfort every time they're used. The maximum working pressure of 6 bars ensures a high performance helper.

In order to protect the container against corrosion, the steel sprayers are given a high value inner coating of plastic. Thus, contact between aggressive spray substances and the container is avoided and the cleaning process is simplified. All devices are TÜV and GS approved - evidence of the safety during use and a durable usability.

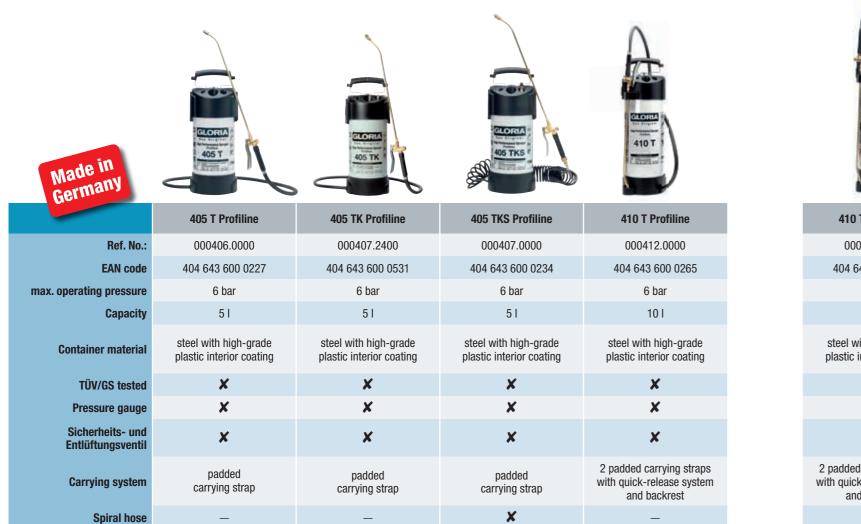

X

X

 \bigcirc

X

X

X

Mobile and flexible - the GLORIA TKS-Models are the right partner for flexible use on the construction site or for car cleaning. If large distances must be continuously covered during the work process, the 5 and 10 litre models offer a clear advantage with their up to 5 metre long spiral pipe.







| 410 TKS Prof | 410 TK Profiline | 410 TI Profiline | | | | | | | |
|--|---|---|--|--|--|--|--|--|--|
| 000416.00 | 000416.2400 | 000414.0000 | | | | | | | |
| 404 643 600 | 404 643 600 0548 | 404 643 600 0319 | | | | | | | |
| 6 bar | 6 bar | 6 bar | | | | | | | |
| 10 I | 10 | 10 | | | | | | | |
| steel with high- plastic interior o | steel with high-grade plastic interior coating | steel with high-grade plastic interior coating | | | | | | | |
| × | × | × | | | | | | | |
| × | × | × | | | | | | | |
| × | × | × | | | | | | | |
| 2 padded carryin with quick-release and backre | 2 padded carrying straps with quick-release system and backrest | 2 padded carrying straps with quick-release system and backrest | | | | | | | |
| × | _ | _ | | | | | | | |
| × | × | _ | | | | | | | |
| × | × | - | | | | | | | |
| | | | | | | | | | |







filine

000

0333

n-grade coating

ng straps se system






Spraying without repumping: Where big surface areas are to be treated, the models with integrated compressor connection provide high operating convenience. Particularly in the cleaning trade the TK and TKS models are frequently employed.

> Transport trolley Suitable for all 10 litre pressure sprayers and high-performance sprayers with anklet. For comfortable transportation of GLORIA spravers.



All GLORIA high-performance sprayers are equipped with the brass flat fanspray nozzle Type 8004E. Spray angle 80°. Appropriate for surface treatme

Stainless steel high performance sprayers

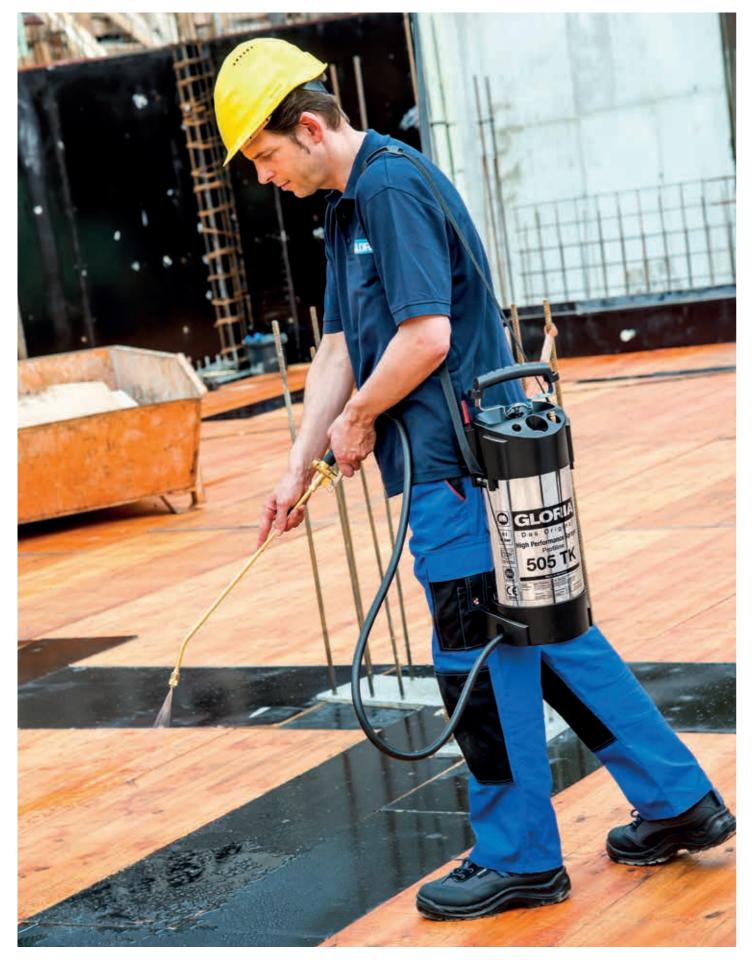



The GLORIA Profiline stainless steel high performance sprayers will win you over with their durability and their corrosion resistance, making them the perfect helper for dispensing mould oil, for cleaning procedures, pest control or even disinfecting sanitary installations. For long work intervals without manual pumping, the 505 TK and 510 TK devices are ideal, as they are equipped with an extra input vent for an electro-compressor. All stainless steel devices are convincing due to their oil-proof design, are absolutely cleaning-friendly and work with a maximum pressure of 6 bar. Needless to say that they are TÜV and GS approved as well.

With a maximum working pressure of 6 bars and a capacity of 5- and 10 litres the high-performance sprayers are perfect for the professional cleaning.



| Made in Germany | | | | |
|--------------------------------|-----------------------------|-----------------------------|---|--|
| | 505 T Profiline | 505 TK Profiline | 510 T Profiline | 510 TK Profiline |
| Ref. No.: | 000506.0000 | 000506.2701 | 000512.0000 | 000512.2700 |
| EAN code | 404 643 600 0357 | 404 643 600 0562 | 404 643 600 0371 | 404 643 600 0456 |
| max. operating pressure | 6 bar | 6 bar | 6 bar | 6 bar |
| Capacity | 51 | 5 | 10 I | 10 I |
| Container material | stainless steel, rust-proof | stainless steel, rust-proof | stainless steel, rust-proof | stainless steel, rust-proof |
| TÜV/GS tested | × | × | × | × |
| Pressure gauge | × | × | × | × |
| Safety- and vent valve | × | × | × | × |
| | paddad | | 2 padded carrying straps | 2 padded carrying straps |
| Carrying system | padded carrying strap | padded carrying strap | with quick-release system and backrest | with quick-release system and backrest |
| Carrying system Spiral hose | | | with quick-release system | with quick-release system |
| | | | with quick-release system | with quick-release system |
| Spiral hose | | carrying strap — | with quick-release system | with quick-release system and backrest — |





VIDEO









Scan the QR Code and see video and picture material of the product. For free. Within a few seconds. Individual advice.



Water feeding device type 415

In building construction and civil engineering, in steel construction or in redevelop-

ment of facades diamond core drilling machines are often employed. These require

a continuous supply of cooling water to compensate for excessive heat and

wet drilling machines as well as to disc grinders or similar devices.

material wearout. The GLORIA water feeding device 415 is characterized by its

versatile applicability. It can be attached to hand-held and drill stand controlled

| Germany | |
|-------------------------------------|--|
| | Water feeding device type 415 |
| Ref. No.: | 000415.0000 |
| EAN code | 404 643 600 0326 |
| max. operating pressure | 6 bar |
| Capacity | 10 I |
| Container material | steel sheet with high-grade plastic interior coating |
| TÜV/GS tested | × |
| Pressure gauge | × |
| Sicherheitssventil | × |
| admissible operating temperature | +50 °C |
| | |

supplied with connecting hose Accessories









| | Compressor Connection valve | Eleculcal-compressor Phori | FIE) |
|-----------|---|---|---|
| Ref. No.: | 728381.0000 | 000680.0000 | 7 |
| EAN code | 404 643 602 1284 | 404 643 602 1291 | 404 |
| | compressor. • Automatic pressure means manual pumping is not needed • Long working intervals with even and optimized spray pattern • Rotating valve • Fits a | A powerful compressor for demanding use. • Directly connects to GLORIA pressure sprayers (requires connection valve 728381.0000). • Motor 230V • 2 cylinders • steel housing • air flow volume 35-40 l/min. • 2-step | Flexible spra treatment of reach places • Suitable fo Nozzle not in |

reducer

| 728233.0000 | |
|---|---|
| 404 643 602 1512 | |
| Flexible spray lance – enables treatment of narrow and hard to reach places. • Suitable for PaintPro 5 Nozzle not included. | Flexible treatme reach p • Suital sprayer Nozzle |
| | |

| 728396.0000 |
|--|
| 404 643 602 1529 |
| Flexible spray lance – enables treatment of narrow and hard to reach places. |
| • Suitable for all high-performance sprayers, Pro 5 / 8, Type 89 |
| Nozzle not included. |



PaintPro 5

The handyman's best friend – a robust sprayer which is designed for a wide range of uses: removing wallpaper when redecorating, the spraying of solvent-free primer (wall paint primer and wash primer) or the application of sprayable wood preservation oils and solvent-free wood scumble. The extensive equipment provides the PaintPro 5 model with a maximum of safety and comfort.



| | PaintPro 5 |
|----------------------|---|
| Ref. No.: | 000105.0000 |
| EAN code | 404 643 602 0584 |
| a operating pressure | 3 bar |
| Capacity | 5 I |
| Container material | high-quality plastic |
| Safety valve | × |
| efficient pump | × |
| Carrying system | ready to be shouldered |
| Miscellaneous | spraying tube holder adjustable brass nozzle, 80° (8001 E) stable bottom ring robust plastic spraying lance |
| | |

Follow the information in the instruction manual. Follow the instructions for use for the applied agent.



pressure sprayers made from

(further models on demand).

plastic: Pro 5, Pro 8, PaintPro 5,



switch with automatic dis-

connection • with pressure



Made in





- Reinforced plastic spraying tube, length 40 cm
- Special brass flat jet nozzle, 80°
- Bottom ring for the highest level of stability
- Oil-resistant version with Viton seals
- High-performance pump with an ergonomic handle
- Large filling funnel with an integrated lance holder
- Piston manometer with an integrated safety valve • Extremely durable plastic 5I tank
- Max. operating pressure 3 bar for long working intervals and a constantly attractive spray pattern







Double action precision pump: with only one pump action the hand sprayer Pro 10 emits two powerful sprays.

Whether on construction sites, in automobile workshops or for pest control, the GLORIA handheld and special pressure sprayers will serve you reliably. Seals made from resistant Viton[®] make the models largely resistant against thermal or chemical influences. The containers are made from high grade plastic and are highly robust. High performance pumps build up a pressure of up to 3 bars for the pressure sprayers, the long intervals between pumps allows for a constant homogenous spray image. The fine sprayers Pro 05 and Pro 10 impress with their double action precision pump. With only one pump action, the devices emit two powerful sprays.

VDEO



The special pressure sprayer Type 89 is equipped with a precision pump and a safety vent as well as a swivel mounted nozzle head. In combination with the foam nozzle, the device can for example be used for motor and rim care.







| | Stratos 5 | Pro 5 | Pro 8 |
|-------------------------|--|-------------------------------|--|
| Ref. No.: | 000179.0000 | 000081.0725 | 000092.0000 |
| EAN code | 400 632 551 0404 | 400 632 569 3046 | 404 643 601 3913 |
| max. operating pressure | 3 bar | 3 bar | 3 bar |
| Capacity | 5 | 5 | 8 |
| Container material | high-grade plastic | high-grade plastic | high-grade plastic |
| Zeigermanometer | × | - | - |
| Safety valve | × | × | × |
| Nozzle | Flat jet nozzle 8004E | adjustable hollow cone nozzle | adjustable hollow cone nozzle |
| Carrying system | ready to be shouldered | ready to be shouldered | ready to be shouldered |
| Oil proof | × | × | × |
| Miscellaneous | brass spray lance, spray lance attachment, bottom ring | brass spray lance | brass spray lance, spray lance attachment, bottom ring |
| | | | |



| Ref. No.: | 000089.0000 | 000094.0000 | 000095.0000 | 000098.0000 |
|-------------------------|--|--|--|--|
| EAN code | 404 632 550 6506 | 404 643 602 2212 | 404 643 602 2229 | 404 643 602 3394 |
| max. operating pressure | 3 bar | — | - | 3 bar |
| Capacity | 1.0 I | 0.5 l | 1.0 l | 1.0 |
| Container material | stable plastic | high grade plastic | high grade plastic | stable plastic |
| Pump | precision pump | Double-acting precision pump: pump 1x = spray 2x | Double-acting precision pump: pump 1x = spray 2x | high performance pump |
| Safety valve | × | _ | _ | × |
| Nozzle | adjustable brass nozzle with swivel mounted nozzle | hitchless adjustable nozzle with brass implementation | hitchless adjustable nozzle with brass implementation | high grade brass flat jet nozzle type 8002, 80° |
| Oil proof | × | × | × | × |
| | | | | |



VIDEO

Long work intervals guaranteed – after only a few pump actions, the high performance pump builds up a maximum working pressure of 3 bar.











The models Pro 5 and Pro 8 have a capacity of 5 and 8 litres. respectively. Big filling funnels and convenient carrying straps make the work comfortable and simple. Frequent operational fields for these devices are the dispersion of sprayable construction chemicals like base coat, deep primer and primer surfacer, but on the other hand also moisturizing of wallpaper for ease of removal.






Piston back mounted sprayer for professional use

Large filling volumes, comfortable work – the GLORIA Piston back mounted sprayer distinguish themselves through their high volume and reach and are perfect for professional use on larger sites and in large gardens. The implementation possibilities for the back mounted sprayers are highly varied, for example in wine plantations, forestry or in greenhouses. The Pro-Models are equipped with a comfortable carrying frame manufactured by the backpack producers Deuter. This ensures a unique carrying comfort thanks to the perfect weight distribution and efficient ventilation system.



Human being as the scale: perfect weight distribution

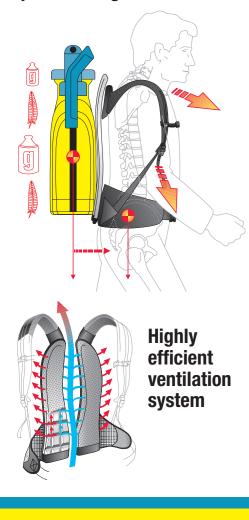

Ergonom

sui bio

| and the second | | |
|--|--|--|
| | Piston knapsack sprayer Pro 1300 | Piston knapsack sprayer Pro 1800 |
| Ref. No.: | 000058.0000 | 000062.0000 |
| EAN code | 404 643 602 3424 | 404 643 602 3448 |
| Capacity | 13 I | 18 |
| Container | Tank ergonomically adapted to the contour of the back | Tank ergonomically adapted to the contour of the back |
| Nozzle | Brass spray lance with hollow cone nozzle recognised by the Julius Kühn Institute | Brass spray lance with hollow cone nozzle recognised by the Julius Kühn Institute |
| Brass pump | × | × |
| Pump lever | Adjustable pump lever wearable on left or right side with spray lance holder | Adjustable pump lever wearable on left or right side with spray lance holder |
| Carrying system | Professional carrying system with breathable foam, anatomically shaped shoulder and hip straps and position adjustment straps | Professional carrying system with breathable foam, anatomically shaped shoulder and hip straps and position adjustment straps |
| ic comfort handle | Quick-acting valve with pressure gauge and soft pad lining | Quick-acting valve with pressure gauge and soft pad lining |
| itable for applying blogical plant care products | × | × |
| Miscellaneous | Incl. brass extension tube 0.5 m and filling sieve | Incl. brass extension tube 0.5 m and filling sieve |
| | | |

Accessories

| | | 405 T Profiline | 405 TK Profiline | 405 TKS Profiline | 410 T Profiline | 410 TI Profiline | 410 TK Profiline | 410 TKS Profiline | 505 T Profiline | 505 TK Profiline | 510 T Profiline | 510 TK Profiline | PaintPro 5 | Water feeding device type 415 | Stratos 5 | Pro 5 | Pro 8 | Fine sprayer type 89 | Fine sprayer Pro 05 | Fine sprayer Pro 10 | Pressure sprayer Pro 100 | Piston knapsack sprayers |
|------------|---|-----------------|------------------|-------------------|-----------------|------------------|------------------|-------------------|-----------------|------------------|-----------------|------------------|------------|-------------------------------|-----------|-------|-------|----------------------|---------------------|---------------------|--------------------------|--------------------------|
| | Brass lance extension type 124 length 0.5 m EAN No.: 400 632 550 1747 Ref. No.: 000124.0000 | • | • | • | • | • | • | • | • | • | • | • | | | • | • | • | • | | | | • |
| | Brass lance extension type 109 length 0.7 m EAN No.: 400 632 550 1600 Ref. No.: 000109.0000 | • | • | • | • | • | • | • | • | • | • | • | | | • | • | • | | | | | • |
| | Brass lance extension type 110 length 1.0 m EAN No.: 400 632 550 1617 Ref. No.: 000110.0000 | • | • | • | • | • | • | • | • | • | • | • | | | • | • | • | | | | | • |
| -0 | Plastic telescopic spray lance complete with connecting hose and valve for pest control, from 0.90 m – 3.00 m. EAN No.: 400 632 570 9341 Ref. No.: 727658.0000 | • | • | • | • | • | • | • | • | • | • | • | | | | | | | | | | |
| | Brass telescopic lance extension type 131 variably extendable from 0.5 to 1.0 m EAN No.: 400 632 550 1860 Ref. No.: 000131.0000 | • | • | • | • | • | • | • | • | • | • | • | | | • | • | • | | | | | |
| | Brass telescopic lance extension type 132 variably extendable from 1.0 to 2.0 m EAN No.: 400 632 550 1907 Ref. No.: 000132.0000 | • | • | • | • | • | • | • | • | • | • | • | | | | | | | | | | • |
| | Brass wide fanspray lance type 107 G particularly suitable for surface spraying and processing of in-row cultivations, width 1.0 m; with 3 flat fanspray nozzles LU 407-03 EAN No.: 400 632 550 6148 Ref. No.: 000107.5000 | • | • | • | • | • | • | • | • | • | • | • | | | | | | | | | | • |
| \bigcirc | Brass brace atomizer type 117 with the brace atomizer especially bigger plants and plants in in-row cultivations are being sprayed. complete with two nozzles (type G-H 49–55). EAN No.: 400 632 550 1686 Ref. No.: 000117.0000 | | • | | • | | • | | • | | • | • | | | | | | | | | | |
| | Spiral hose, 5 m EAN No.: 404 643 600 6946 Ref. No.: 727883.0000 | • | • | | • | • | • | | • | • | • | • | | | | | | | | | | |
| | Cleaning agent for sprayers 250 ml Ecological cleaning agent EAN No.: 404 643 602 2106 Ref. No.: 001100.0000 | • | • | • | • | • | • | • | • | • | • | • | | | • | • | • | • | • | • | • | |
| 7 | Compressor connection EAN No.: 400 632 550 1938 Ref. No.: 000135.0000 | • | | | • | • | | | • | | • | | | • | | | | | | | | |
| | Pressure regulator to set the desired operating pressure. EAN No.: 400 632 550 0023 Ref. No.: 000022.0000 | • | • | • | • | • | • | • | • | • | • | • | | | • | | | | | | | |
| | Transport trolley ONLY suitable for: • 410 T • 410 TI • 410 TK • 410 TKS • 510 T • 510TK • 510TK • Typ 415 EAN no: 404 643 600 0401 Ref. No.: 000198.5001 | | | | • | • | • | • | | | • | • | | • | | | | | | | | |

Nozzles

| | | | | | | Flow rate i | in I/min at | | | | a | ne | | | Ð | e | | ۵ | | ۵ | | evice type 415 | | | | type 89 | 0 05 | Pro 10 | ayer Pro 100 | sk sprayers | |
|----|--|--|---------|--------------------|-------|-------------------|------------------|-------------------|-------|-------------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|-----------|-------|---------|-----------------|------------------|-----------------|----------------|----------------|
| | | | | Material | 1 bar | 2 bar | 3 bar | 4 bar | 5 bar | 6 bar | 405 T Profiline | 405 TK Profilin | 405 TKS Profili | 410 T Profiline | 410 TI Profiline | 410 TK Profilin | 410 TKS Profili | 505 T Profiline | 505 TK Profilin | 510 T Profiline | 510 TK Profilin | PaintPro 5 | Water feeding d | Stratos 5 | Pro 5 | Pro 8 | Fine sprayer ty | Fine sprayer Pro | Fine sprayer Pr | Pressure spray | Piston knapsac |
| ٢ | Flat fanspray nozzle type 90-02E, surface treatment by constant definition of spray width Ref. No.: 000111.0000 EAN no.: 400 632 550 1624 | | 90° | Brass | 0,46 | 0,65 | 0,8 | 0,92 | 1,0 | 1,1 | • | • | • | • | • | • | • | • | • | • | • | | | • | | | | | | | • |
| 8 | Flat fanspray nozzle type 6502 surface treatment by constant definition of spray width Ref. No.: 728248.0000 EAN no.: 404 643 602 0454 | | 65° | Brass | 0,45 | 0,64 | 0,8 | 0,92 | 1,0 | 1,1 | • | • | • | • | • | • | • | • | • | • | • | | | | | | | | | | • |
| | Flat fanspray nozzle type 8004E surface treatment by constant definition of spray width Ref. No.: 728258.0000 EAN no.: 404 643 602 0423 | | 80° | Brass | 0,91 | 1,29 | 1,58 | 1,82 | 2,03 | 2,23 | • | • | • | • | • | • | • | • | • | • | • | | | | | | | | | | • |
| - | Special lime nozzle excellently suitable for dispersion of viscous sprayed media, e.g. limewashing of stables and cellar rooms. spray jet emanating on the front side. EAN no.: 400 632 550 1631 Ref. No.: 000112.0000 | | 65° | Brass / Steel | | 2,83 | 3,47 | 4,01 | | 4,91 | • | • | • | • | • | • | • | • | • | • | • | | | | | | | | | | • |
| | Brass hollow conespray nozzle, adjustable EAN no.: 400 632 550 1648 Ref. No.: 000113.0000 | | 0 – 50° | Brass | | 0,95 _ 1,29 | 1,16 1,58 | 1,34 - 1,83 | | 1,64 _ 2,23 | • | • | • | • | • | • | • | • | • | • | • | | | • | | | | | | | • |
| 10 | Hollow conespray nozzle ø 2 mm with atomizer insert, nozzle type G-H 116-80. EAN no.: 400 632 562 0684 Ref. No.: 725820.0000 | | 80° | Brass | | 1,16 | 1,47 | 1,71 | | 2,08 | • | • | • | • | • | • | • | • | • | • | • | | | | | | | | | | • |
| JØ | Hollow conespray nozzle ø 1 mm with atomizer insert, nozzle type G-H 49-55. EAN no.: 400 632 562 0875 Ref. No.: 725830.0000 | | 55° | Brass | | 0,49 | 0,60 | 0,69 | | 0,85 | • | • | • | • | • | • | • | • | • | • | • | | | • | | | | | | | • |
| | Crack- and crevice nozzle special nozzle, best suitable for pest control. for crevices from 2,5 mm. EAN no.: 400 632 592 7387 Ref. No.: 727885.0000 | | | Brass / plastic | | | | | | | • | • | • | • | • | • | • | • | • | • | • | | | • | | | | | | | • |
| 0- | Foam nozzle ideally suitable for disinfection, for cleaning purposes, car care, chemical industry EAN no.: 400 632 562 4682 Ref. No.: 726133.0000 | | | | | | | | | | • | • | • | • | • | • | • | • | • | • | • | | | • | • | • | • | | | • | • |
| 0 | Cap filter Mesh width: 0.365mm suitable for use with flat jet nozzles EAN no.: 404 643 602 0430 Art. no.: 728259.0000 | | | | | | | | | | • | • | • | • | • | • | • | • | • | • | • | | | | | | • | | | | • |

Further compatible nozzles and filters available on request.

Fields of application

The products of the the GLORIA Profiline are suitable for a broad rage of applications in industry and handcraft. The following list will give you an overview about the numerous possibilities to use the GLORIA high performance sprayers as well as the handheld and special pressure sprayers in your daily work.

Civil engineering

- Mould oil / release agent
- Core drilling machine
- Disc grinder
- Channel drilling machine
- Concrete curing / impregnation

Road building

- Rail Construction / Lubrication of slide plates
- Release agent for ceiling production
- Manhole cover
- Cleaning and preparation of machines
- Curbstones and Road marking

Handcraft

- Wallpaper solvent / Primer surface / Base coat
- Disinfection
- Cleaning (f.e. kitchen floor, stone, boilers...)
- Upholstery and carpet impregnation
- Pest control

Handcraft

- Machine conservation
- Coolant
- Lubrication with liquid grease
- Disinfection / cleaning of dairies
- Disinfection / cleaning of butcher's

Agriculture and forestry

- Plant protection
- Weedkilling
- Spraying media against hunting game bite
- Disinfection in livestock farming

















Types of elastomer for use as seals by GLORIA

| Abbreviation | n | Chemical name | Known trade name | Prope |
|--------------|------|-------------------------------------|---------------------|--|
| NBR | NBR | Acrylonitrile- butadiene rubber | Perbunan® | Highly good gener with v |
| FPM / FKM | FPM | Fluorinated rubber | Viton® | Elastic use. V carbo resista and a |
| EPDM | EPDM | Ethylene-propylene- diene rubber | Buna EP® | High r Poor r |

Discover the extensive **GLORIA** product range for house and garden, handiwork, industry and cleaning.



The GLORIA Product range for house and garden. From fine and handheld sprayers for terraces and balconies to pressure sprayers with 3-8 litre volumes all the way to piston back mounted sprayers for professional use in forestry and agriculture; you will find numerous devices and helpers in the current catalogue.

The current GLORIA product catalogues and brochures can be received from a specialist dealer in your area or as a PDF download on the GLORIA homepage (see page 2).

erties

y elastic synthetic rubber with mechanical properties and rally good resistance to swelling versatile use.

ic synthetic rubber for industrial Very good resistance to hydroons (oil, grease, solvents). Highly tant to chemicals, temperature aging.

resistance to acids and bases. resistance to hydrocarbons.

Application purpose

GLORIA standard seal material for primary applications in sprayers for plant protection and gas fittings.

Seal material for all highperformance sprayers for industrial applications and equipment for special applications.

Used in the cleaning and food industry.





The complete GLORIA Profiline assortment for cleaning, presented in a user friendly overview in our twelve page brochure. Inform yourself about our performance spectrum and our product assortment for vehicle care, cleaning and disinfection work as well as pest control.

Your GLORIA specialist dealer:

98-273 · General notes: The right to make technical amendments reserved. Errors and omissions excepted.



GLORIA

Haus- und Gartengeräte GmbH Därmannsbusch 7 · D-58456 Witten Phone: +49 (0) 2302 / 700 0 Fax: +49 (0) 2302 / 700 46 www.gloriagarten.de Sales and Marketing headquarters Edisonallee 3 · D-89231 Neu-Ulm Phone: +49 (0) 731 / 140 60 47 Fax +49 (0) 731 / 140 60 43 info@gloria-garten.com